

FIXED TABLE INSTALLATION

Dec. 1, 2001
P/N: 20380-01

TOOLS REQUIRED:

$\frac{3}{16}$ " Allen Wrench
Power Driver
#2 Phillips Head Bit
#3 Phillips Head Bit

PROCEDURE:

1. Place worksurface upside down on clean area. Align columns with predrilled holes on worksurface. (See Figure 1). Call Customer Service if hole patterns are needed.
2. Attach each column to the worksurface, ensuring that the column cover insert is facing inward, using (6) each #12 x $1\frac{1}{8}$ " pan head screws. (See Figure 1).
3. Attach feet using (2) each $\frac{5}{16}$ x $\frac{1}{2}$ " button head socket screw using outside holes on each foot. (See Foot Detail Drawing).
5. Dual Surface Only – Insert Brake Release in right-hand slot. Secure with (2) #8 x $\frac{3}{4}$ " pan head screw. (See Brake Release Detail Drawing).
6. Dual Surface Only – If necessary form a loop with excess cable from keyboard brake release and secure with plastic cable retainer and (1) #8 x $\frac{3}{4}$ " pan head screw. Ensure that enough slack remains to fully operate the keyboard. (See Brake Release Detail Drawing).

Single Surface – *Proceed to Final Assembly*

Dual Surface – *Continue with Step 4*

4. Dual Surface Only – Mount keyboard arm to monitor surface using (2) #12 x $1\frac{1}{8}$ " pan head screws on left side and (4) on right side, using power driver and #3 Phillips head bit. (See Figure 2).

FINAL ASSEMBLY:

7. Turn upright. Level worksurface by adjusting glides.

If any problems are experienced, please call Baker Manufacturing Customer Service at 888-512-7036.



ZYDECO *It Moves*

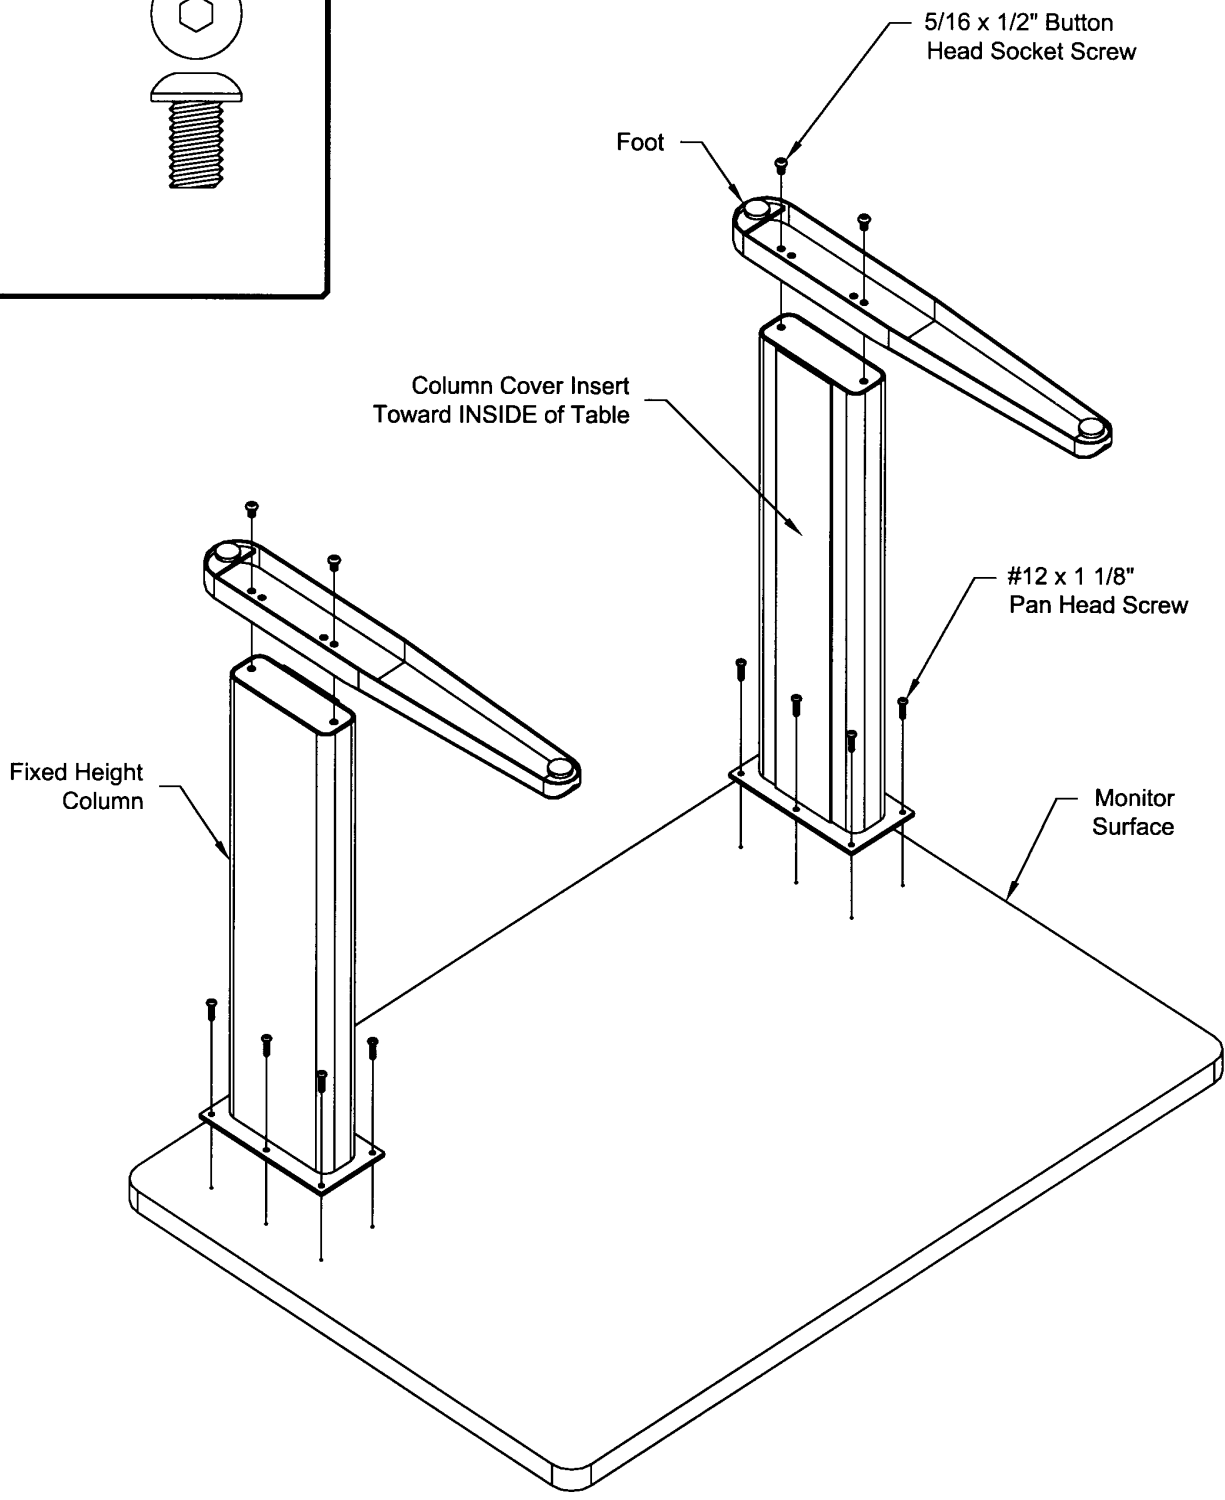
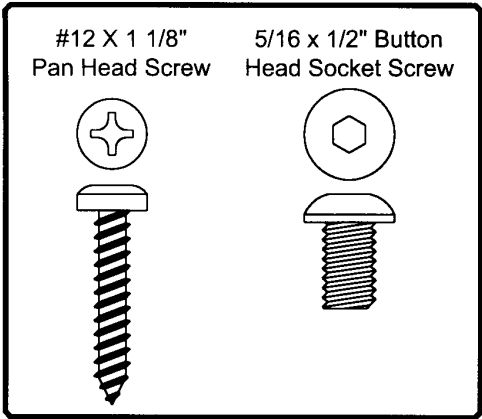


FIGURE 1
(SINGLE SURFACE)


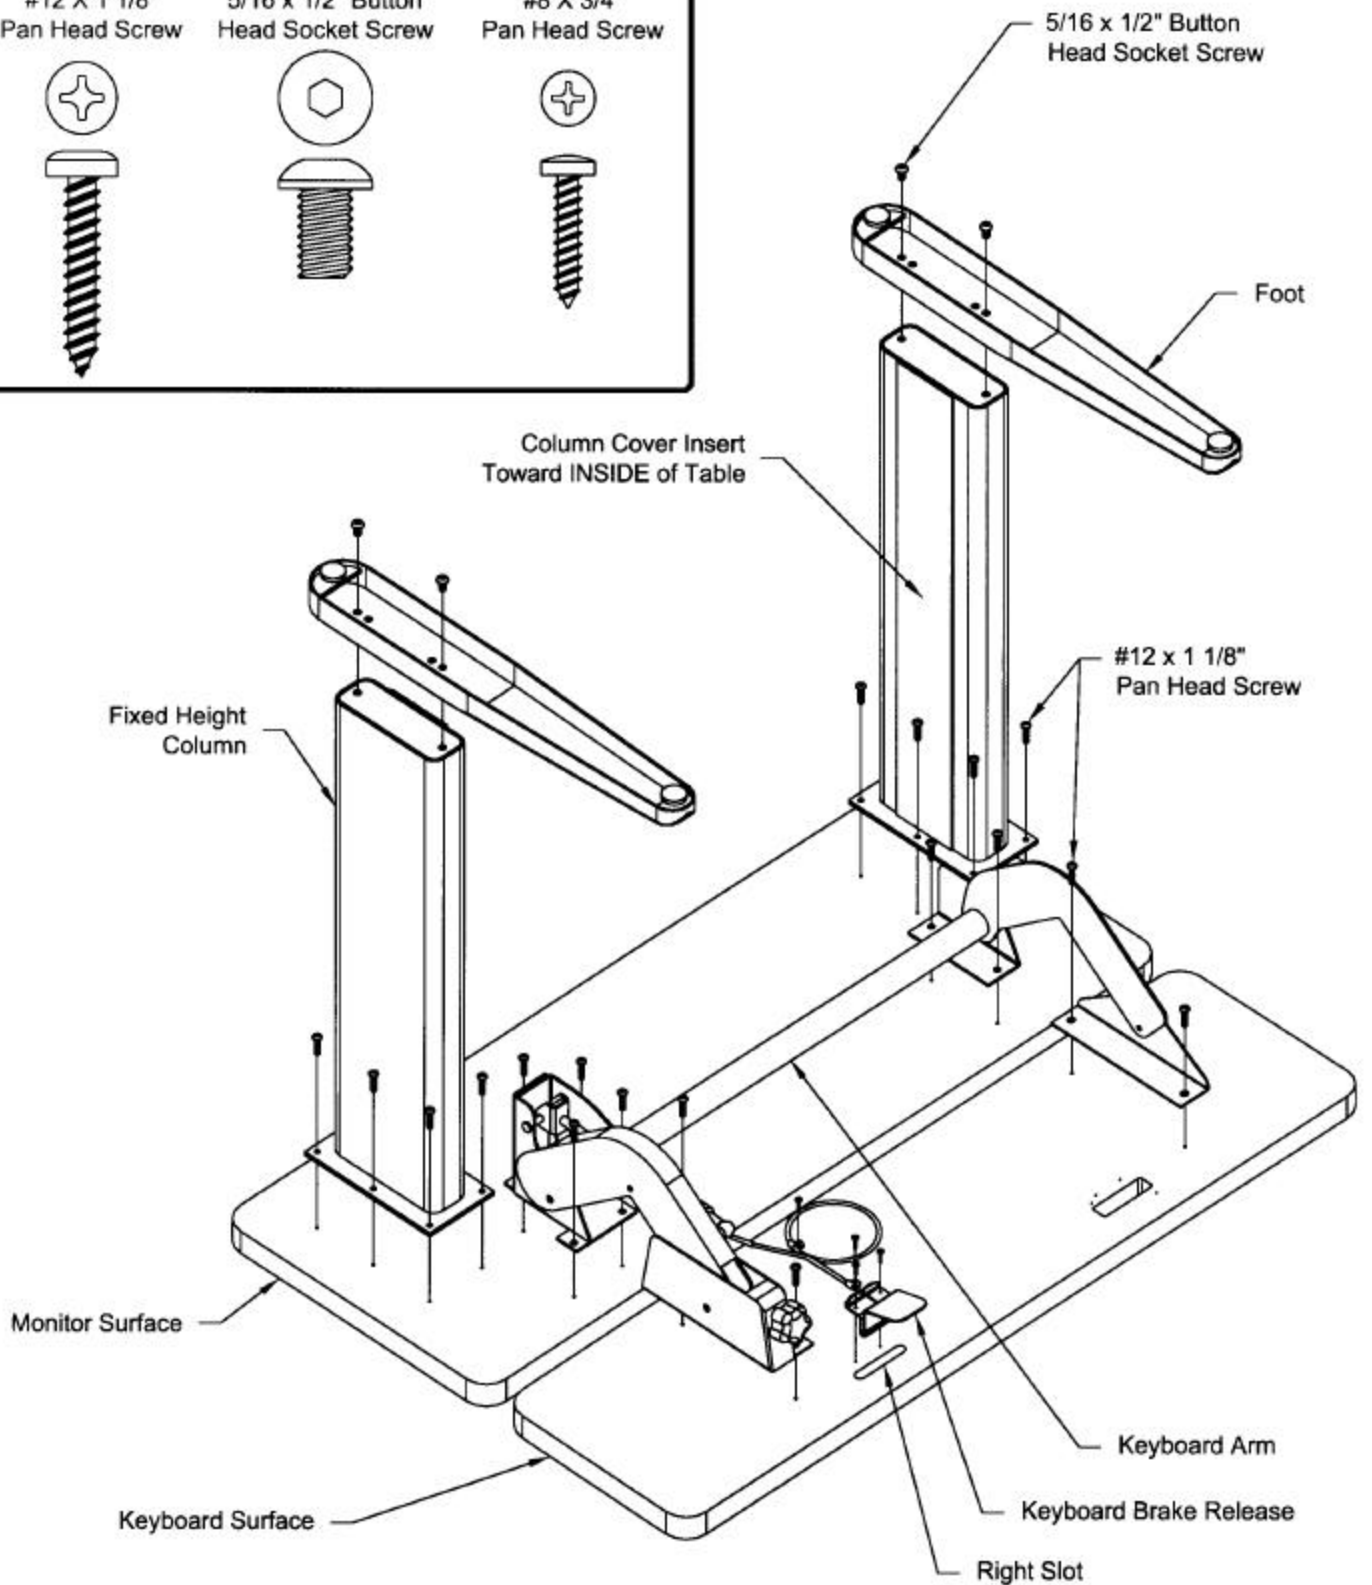


FIGURE 2
(DUAL SURFACE)

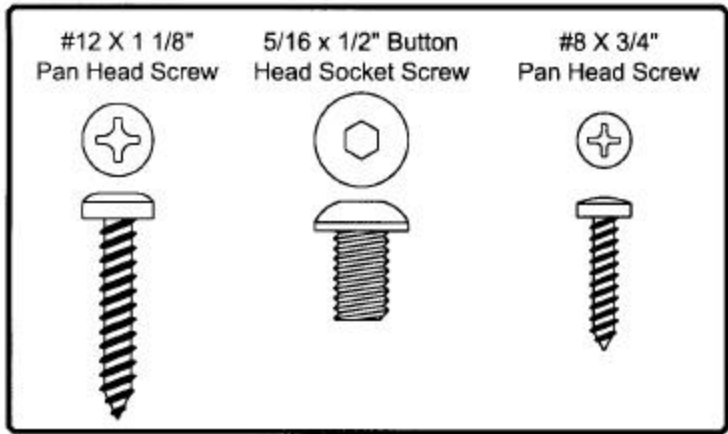